

CAxxxx Cables

Technical Datasheet

CA0001



For LWC-L Battery (UBBL01)	
Battery Connector	LEMO FGG 0B 305 CLA
Cable Length	61 cm. (24 in.) nominal
Cable Type	2 Conductor; 22 AWG; red positive, black negative
Insulation	Foil shielded black PVC

CA0002



Pin 1	
Pin 2	
Pin 4	
Pin 5	


For UBI-2590 Battery (UBBL02) and UBBL09	
Cable Length	61 cm. (24 in.) nominal
Cable Type	4 Conductor; 18 AWG
Pin/Wire Color Key	Pin 1 Black, Pin 2 White, Pin 4 Red, Pin 5 Green
Insulation	Black type SJOOW rubber

CA0003



Pin 1	
Pin 2	
Pin 3	
Pin 4	
Pin 5	

For UBBL03 Battery (Type LI-7)	
Battery Connector	JBXFN1G05MCSDSMR
Cable Length	61 cm. (24 in.) nominal
Cable Type	5 Conductor, 20 AWG
Pin/Wire Color Key	Pin 1 Red, Pin 2 Green, Pin 3 White, Pin 4 Black, Pin 5 Blue
Insulation	Foil shielded black PVC

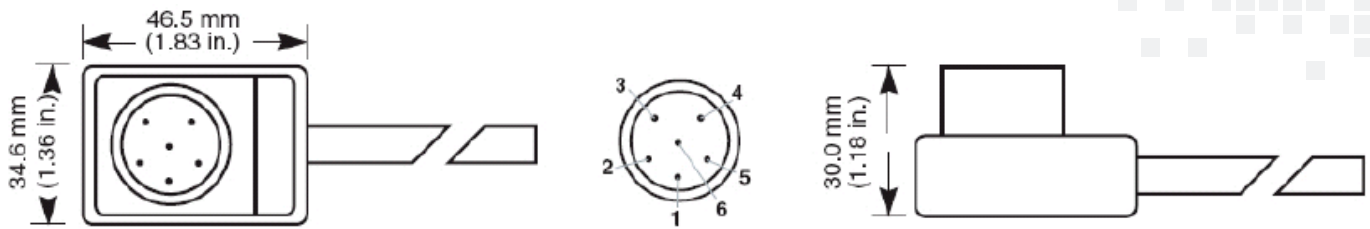

CA0006: 24V



For UBI-2590 Battery (UBBL02), BA-5390 Battery (UB0001) and UBBL09 Battery

Cable Length	61 cm. (24 in.) nominal
Cable Type	24V, 2 Conductor; 18 AWG
Pin/Wire Color Key	Pin 4 White/positive, Pin 2 Black/negative
Insulation	Black type SJ rubber

CA0007: 12V



For UBI-2590 Battery (UBBL02), BA-5390 Battery (UB0001) and UBBL09 Battery

Cable Length	61 cm. (24 in.) nominal
Cable Type	4 Conductor; 18 AWG
Pin/Wire Color Key	Pins 4 & 5 White/Positive, Pins 1 & 2 Black/Negative
Insulation	Black type SJOOW rubber

CA0008:12/24V



For UBI-2590 Battery (UBBL02), BA-5390 Battery (UB0001) and UBBL09 Battery

Cable Length	61 cm. (24 in.) nominal
Cable Type	12/24V, 4 Conductor; 18 AWG
Pin/Wire Color Key	Pin 1 Black, Pin 2 White, Pin 4 Red, Pin 5 Gray
Insulation	Black type SJ rubber

Pin 1	
Pin 2	
Pin 4	
Pin 5	