

URB12550-22NF

Technical Datasheet



LITHIUMPOWER

Li-Ion LFP Benefits Over SLA

- Uniform voltage during discharge
- No need to provide trickle charging to retain battery's charge
- Significantly lighter weight for the same amount of energy
- Battery does not become gaseous during use
- Nominal voltage is maintained over a wider temperature range

Features

- Integrated carry handles
- Can be properly charged using a 2 phase SLA charger
- IEC 61233, 2nd edition compliant

Applications

- Scooters / wheelchairs
- UPS battery replacement
- Solar power battery

Constant Voltage Charge at 23°C	Voltage Regulation	Initial Current	Maximum Current
Standby Use	13.6V	10A	50A
Cycle Use	14.4V	25A	50A

Technical Specifications




Part No	URB12550-22NF	
Chemistry	Lithium Iron Phosphate (LFP)	
IEC Designation	4IFR27/66-17	
Average Voltage	12.8V	
Nominal Capacity¹	52.7Ah	
Voltage Range	10.0V - 14.4V	
Max. Continuous Discharge	55A	
Max. Pulse Discharge²	300 ± 50A	
Energy¹	675Wh	
Energy Density	90Wh/kg, 143Wh/l	
Weight	Approx. 7.5 ± 0.3kg (16.5 ± 0.7lbs)	
Cycle Life	>1,500 cycles	
Operating Temperature	-20°C to +60°C discharging 0°C to +45°C charging	
Storage Temperature	0°C to +40°C	
Internal Resistance	≤30mΩ	
Self-Discharge @ +23°C	<5% per month	
Memory Effect	None	
Exterior/Housing	Hard plastic, ABS	
Terminals/Connector	M6 Screw Terminals (Torque 6.0-7.0N-m)	
Size	Length:	228 ± 1mm (8.97in)
	Width:	138 ± 1mm (5.43in)
	Height:	208 ± 1mm (8.18in)
Communications	None	
State of Charge Indicator	None	
Protection	Overcharge:	3.90V (per cell)
	Over Discharge:	2.00V (per cell)
	Over Current:	300 ± 50A (7-17ms)
	Over Temperature:	65 ± 5°C
	Short Circuit Cell Imbalance	
Charging	Connect the battery to a DC power source using correct polarity and apply a maximum voltage of 14.4V. Limit the current to the recommended rate of 10.0A and hold 14.4V until the current declines to 1.0A. Maximum charge rate is 50.0A. Alternatively, you may apply a maximum charge voltage of 13.6V (limiting the current to 10.0A) and hold indefinitely to maintain the battery in a continuous standby state-of-charge of between 70-90%.	
Safety	Material Safety Datasheet - MSDS00152 Refer also to Safety Guide UBM-5112	
Certifications	CB Scheme (ID: FI-17457)	
Transportation⁴	UN 3480 Dangerous Good Class 9, Total Energy >300Wh UN Testing Summary - UNTS-0241	
Harmonized Tariff Schedule	8507.60.0000	

Notes

1. Using a C/5 discharge rate at +25°C.
2. Maximum pulse width of between 7ms and 17ms.
3. Number of consecutive C/5 rate discharges and recommended charges at 25 ± 5°C until the battery reaches 80% of initial capacity.
4. Transportation regulations, classifications and lithium content are available on the Ultralife website.



Dimensions

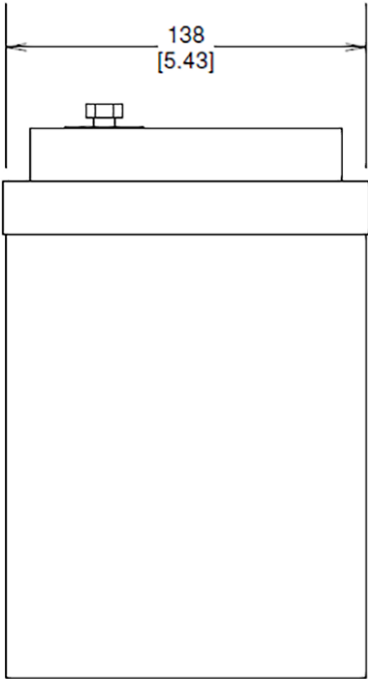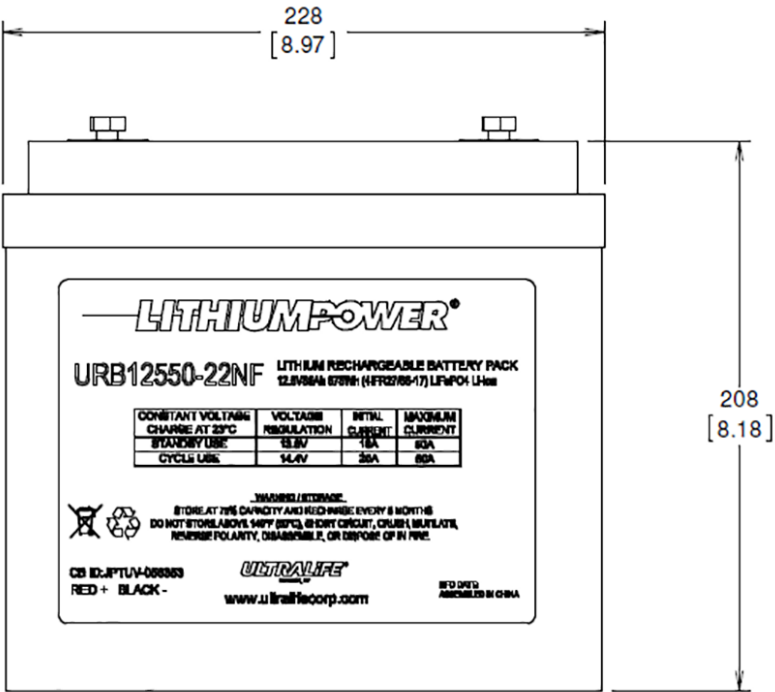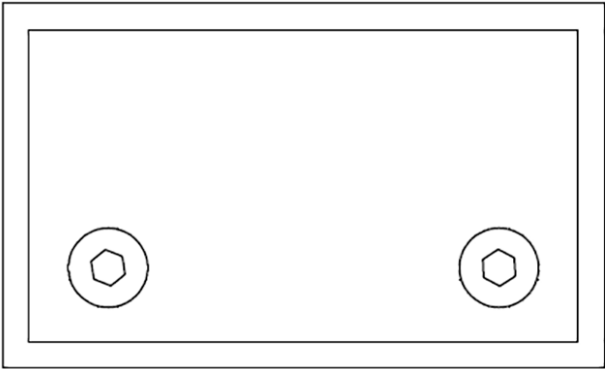

LITHIUM POWER
URB12550-22NF LITHIUM RECHARGEABLE BATTERY PACK
 12.8V/60Ah (270Wh) (HFR2706-17) LFP/PO4 LHM

CONSTANT VOLTAGE CHARGE AT 25°C	VOLTAGE REGULATION	INITIAL CURRENT	MAXIMUM CURRENT
STANDARD USE	13.8V	15A	60A
CYCLE USE	14.4V	25A	60A

WARNING / STORAGE:
 STORE AT 25% CAPACITY AND RECHARGE EVERY 6 MONTHS.
 DO NOT STORE ABOVE 140°F (60°C), IN DRY CIRCUIT, CRUSH, MUTILATE,
 REVERSE POLARITY, DISASSEMBLE, OR DISPOSE OF IN FIRE.

CS ID: IPTU-006883
 RED + BLACK -

ULTRALIFE
 www.ultralife corp.com

RED OREGON
 ASSEMBLED IN CHINA